



Specification For Approval

Part NO. : WFX-20050829-72

Ver: A0


Product Code : 53-38-0412

Page : 1 / 1

1.CONSTRUCTION

Item		A.Q.L	Description
Conductor	NO./mm	0.18 (+/-0.008)	Stranded bare copper
	4 / 0.18 x 12		
Insulation	NO./mm	1.50	Red,Green,Black,White
	4 / 1.50	(+/-0.13)	PVC Insulation
Shield	Filling	Cotton thread	Cotton thread filling
	Cotton paper		Cotton paper spiral shield
	T0.12 x 96	96(+/-2) ; 0.12 (+/-0.008)	Tinned copper braid shield
Jacket	NO./mm	5.70	Matted soft black PVC jacket
	5.70	(+/-0.50)	

2.DESIGN

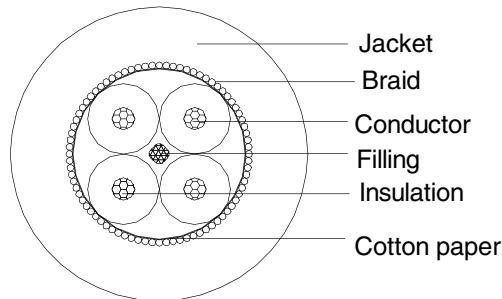

3.CHARACTERISTICS

Item	Description	Standards
1. Cond. Res.	20°C, Conductor DC Resistance	< 7.18 Ω/100M
2. Insul. Res.	20°C, Insulation Resistance	> 500 MΩ.M
3. Rated Tem.	-----	70°C
4. Rated Voltage	-----	30 V

Remark: Please contact us if you have more requirements or specifications subject to change, or else in accordance with the standards.

Prepared: Liu

Approved by :

Client approved :

Date: 2005-8-30