



REV.

REVISION

DATE


LC/PC MM CONNECTOR

HOUSING COLOR : BEIGE

TEXT PRINTING :
E222963 (UL) C(UL) OFNR RISER CABLE 50/125 OM3 MM xxxxxM

L±T

LC/PC MM CONNECTOR
HOUSING COLOR : BEIGE

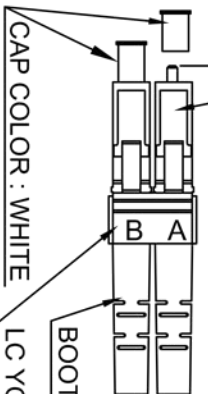

CAP COLOR : WHITE

BOOTS COLOR: WHITE

CABLE COLOR: 2.0mm AQUA

BOOTS COLOR: WHITE


CAP COLOR : WHITE

LC YOKE COLOR: BEIGE




(YOKE FACE UP)

VELCRO TIE



DETAIL A

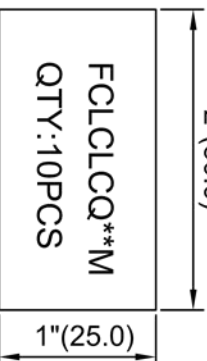


DETAIL B

FCLCLCQ**M
QTY:10PCS

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL (POLYBAG (DETAIL C))	1 CABLE & TEST REPORT	NONE
MEDIUM (POLYBAG)	10 CABLES (1M~10M)	SEE "DETAIL B"
LARGE (POLYBAG)	ALL	NONE




Fiber Optic Test Report			
Multimode Patch Cable			
Insertion Loss	<0.3	A	PASS
		B	PASS

TEST REPORT

CHART

(YOKE FACE UP)



FCLCLCQ60M	60	60	196.9	196.9(60000)	±4(±100)
FCLCLCQ55M	55	55	180.5	180.5(55000)	±4(±100)
FCLCLCQ50M	50	50	164.0	164.0(50000)	±4(±100)
FCLCLCQ45M	45	45	147.6	147.6(45000)	±4(±100)
FCLCLCQ40M	40	40	131.2	131.2(40000)	±4(±100)
FCLCLCQ35M	35	35	114.8	114.8(35000)	±4(±100)
FCLCLCQ30M	30	30	98.4	98.4(30000)	±4(±100)
FCLCLCQ25M	25	25	82.0	82.0(25000)	±4(±100)
FCLCLCQ20M	20	20	65.6	65.6(20000)	±4(±100)
FCLCLCQ15M	15	15	49.2	49.2(15000)	±4(±100)
FCLCLCQ10M	10	10	32.8	32.8(10000)	±4(±100)
FCLCLCQ07M	07	7	22.97	22.97(7000)	±2(±50)
FCLCLCQ05M	05	5	16.4	16.4(5000)	±2(±50)
FCLCLCQ03M	03	3	9.84	9.84(3000)	±2(±50)
FCLCLCQ02M	02	2	6.56	6.56(2000)	±2(±50)
FCLCLCQ01M	01	1	3.28	3.28(1000)	±2(±50)

PART NO.	**	X	##	L	T
CUSTOMER APPROVAL:					
DATE:					

UNIT:		TITLE:	
Inches [mm]		FIBER OPTIC CABLE DUPLEX MULTIMODE 50/125, LC TO LC AQUA PVC JACKET, xx METERS.	
DRAWN BY	DATE	CUSTOMER	
Liang	2011/10/20	WECL	
CHECKED BY	DATE	CUSTOMER PART NO.	
		FCLCLCQ**M	
APPROVED BY	DATE	Ref. NO.	
		PP1110004	
SALE BY	DATE	TRENDEX PART NO.	
		A	